
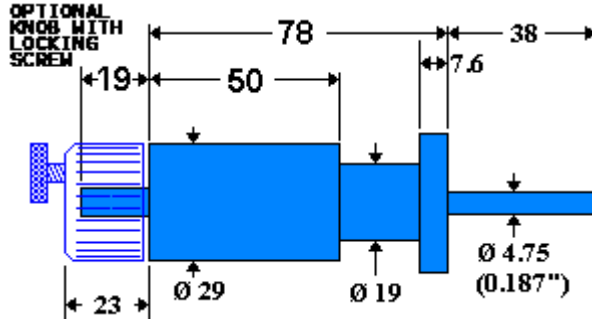


Rotary Drives

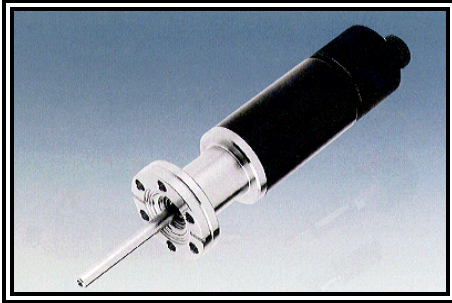

- Torque 0.1Nm hand turned.
- Torque 0.1Nm at 300 RPM
- Range of HV and UHV flanges.
- Fully bakeable to 250°C standard, 400°C dismantled.
- Dimensionally compatible to other miniature drives.
- Thrust 16N

The RD93 series of miniature rotary drives are supplied as standard with a hand operating knob and locking screw (except RD93P) which can easily be removed for direct coupling of the output shaft to a drive system.

Order Information

Flange OD mm	Flange OD in.	Ship Weight	Torque Max(Nm)	Torque at 10 RPM	Resolution	Part #	Price
34	1.33	0.3	0.012	0.01	n/a	ZRD93	P.O.R.
34 ¹	1.33	0.3	0.012	0.01	n/a	ZRD93P	P.O.R.
70	2.75	0.5	0.012	0.01	n/a	ZRD932	P.O.R.
40 ²	1.56	0.3	0.012	0.01	n/a	ZRD93K	P.O.R.

1. The ZRD93P is identical to the ZRD93 except that it does not have the operating knob
2. SKF25 flange.

Call Vortex Vacuum for basic and advanced sample manipulation solutions.